

ROW MULCHERS

SEVEN MODELS,
PAYLOADS UP TO 20,000 LBS.



FARMERS TALK, WE LISTEN



Smart design and heavy duty construction provide the perfect combination of durability, reliability and spreading precision.

Lanco Row Mulchers are the industry's most versatile spreaders for spreading mulch, compost and any other similar materials from a light coating to a spread that is several inches high.

A self-contained hydraulic system makes it possible to completely control the speed of the apron chain and cross belt at any tractor ground speed for precise spreading performance.

These state-of-the-art row mulchers are constructed of galvanized panels on tube steel chassis. The poly lumber floor has a 10-year lifespan and the chassis and frame are primed and painted with rust-proof paint.

One look and you'll see the difference. Lanco Row Mulchers are what every farmer looks for. How do we know? We asked.

Ask about optional auger and conveyor discharge systems. Truck mounts also available.

MADE IN LANCASTER COUNTY TO WORLD-CLASS STANDARDS

BETTER SPREADING MADE SIMPLE

717-556-4143


WWW.LANCOEQUIPMENT.COM

LANCO
Manufacturing, CO.

LANCO Manufacturing, CO.

ROW MULCHER

The body is constructed of galvanized steel panels on a heavy channel chassis. The poly lumber floor has a 10 year warranty. Chassis and frame are primed and painted with red rust-proof paint.

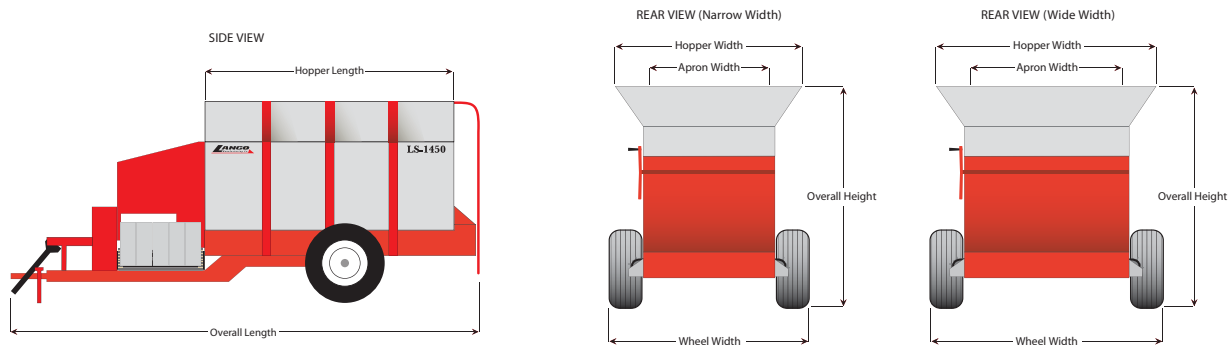

Specifications	Regular Width				Wide Width		
	Model LS-1250	Model LS-1450	Model LS-2080	Model LS-2450	Model LS-2120	Model LS-3520	Model LS-5450
Capacity Cu. Yd. Struck	3.1 yd ³	4 yd ³	6 yd ³	7 yd ³	5.7 yd ³	10.2 yd ³	N/A
Capacity Cu. Yd. Heaped*	4.6 yd ³	5.3 yd ³	7.7 yd ³	9 yd ³	7.8 yd ³	13 yd ³	20 yd ³
Tractor HP***	25 HP	30 HP	50 HP	50 HP	40 HP	80 HP	80 HP
Tractor Min. Weight**	2,500 lb.	3,000 lb.	5,000 lb.	5,000 lb.	4,000 lb.	7,000 lb.	8,000 lb.
Payload Maximum	5,000 lb.	6,000 lb.	10,000 lb.	10,000 lb.	8,000 lb.	14,000 lb.	20,000 lb.
Net Weight	2,200 lb.	2,800 lb.	3,400 lb.	3,600 lb.	3,300 lb.	4,300 lb.	5,200 lb.
Standard Tires	11 Lx 15	11 Lx 15	11 Lx 15 Tandem	11 Lx 15 Tandem	11 Lx 15 Tandem	16.5L x 16.1 Tandem	16.5L x 16.1 Tandem
Wheel, Width Out-to-Out	4'0" (48")	5'2" (62")	6'2" (74")	6'2" (74")	7'8" (92")	7'10" (94")	7'10" (94")
Apron Chain Width	2'6" (30")	3'1" (37")	3'1" (37")	3'1" (37")	4'7" (55") Dual	4'7" (55") Dual	4'7" (55") Dual
Hopper Width	4'3" (51")	4'10" (58")	4'10" (58")	4'10" (58")	6'4" (76")	6'4" (76")	6'4" (76")
Height Overall	7' (84")	7' (84")	7' (84")	7' (84")	7' (84")	7' (84")	8'10" (106")
Length, Hopper Box	8'	8'	12'	14'	8'	14'	16'
Length, Overall	16'6" (198")	16'6" (198")	20'4" (245")	22'5" (269")	17'2" (206")	23'4" (280")	25'4" (304")

* Heaped capacity will be greater, depending on material and conditions.

** For level or gently rolling terrain, tractor weight must be at least 50% of the gross loaded spreader weight. For hilly terrain, road travel, or other adverse conditions, tractor weight must be equal to gross loaded spreader weight.

*** Smaller HP tractor can be used if it weighs as much as the loaded row mulcher.

Custom design available for specific applications. Call for information.

Options	Regular Width				Wide Width		
	LS-1250	LS-1450	LS-2080	LS-2450	LS-2120	LS-3520	LS-5450
12 Volt On/Off OR Speed Control	✓	✓	✓	✓	✓	✓	✓
Hydraulic Gate Req. Tractor Hyd.	✓	✓	✓	✓	✓	✓	✓
Raised Body 32" Below Crossbelt	✓	✓	✓	✓	✓	✓	✓
Vertical Ext. 14"	N/A	✓	✓	✓	✓	✓	Std.
Tandem Axle Various Tire Package	✓	✓	✓	✓	✓	✓	✓
Cleated Cross Belt	✓	✓	✓	✓	✓	✓	✓
Extension Conveyor	✓	✓	✓	✓	✓	✓	✓
Dual Discharge Belt	✓	✓	✓	✓	✓	✓	✓

BETTER SPREADING MADE SIMPLE

717-556-4143

WWW.LANCOEQUIPMENT.COM

LANCO
Manufacturing, CO.