

LITTER/LIME SPREADERS

SIX SIZES,
UP TO 578 CUBIC FOOT CAPACITY

DUAL PURPOSE - LITTER & LIME



**Access Ladder
Standard on
Litter Spreaders!**

FARMERS TALK, WE LISTEN

We design our spreaders by listening carefully to what farmers say, then deliver extra value by using the highest quality materials with a firm commitment to uncompromising workmanship.

Rugged and dependable Lanco Litter Spreaders deliver the performance and productivity you need. Having the right capacity spreader for your application can make all the difference which is why the family of Lanco Litter Spreaders includes six sizes ranging from 355 cubic foot capacity to 578 cubic foot capacity.

Lanco Litter Spreaders come standard with PTO Hydraulic drive.

One look and you'll see the difference. Lanco Litter Spreaders represent the value farmers look for. How do we know? We asked.

***Ask about optional auger and conveyor discharge systems.
Truck mounts also available.***



Lanco litter/lime spinners have the flexibility to allow you to use the machine as either a litter spreader or a lime spreader. The machine can be run with no attachment to function as a grain cart!

MADE IN LANCASTER COUNTY TO WORLD-CLASS STANDARDS


BETTER SPREADING MADE SIMPLE

717-556-4143

WWW.LANCOEQUIPMENT.COM

LANCO
Manufacturing, CO.

MORE HIGH QUALITY FEATURES COME STANDARD

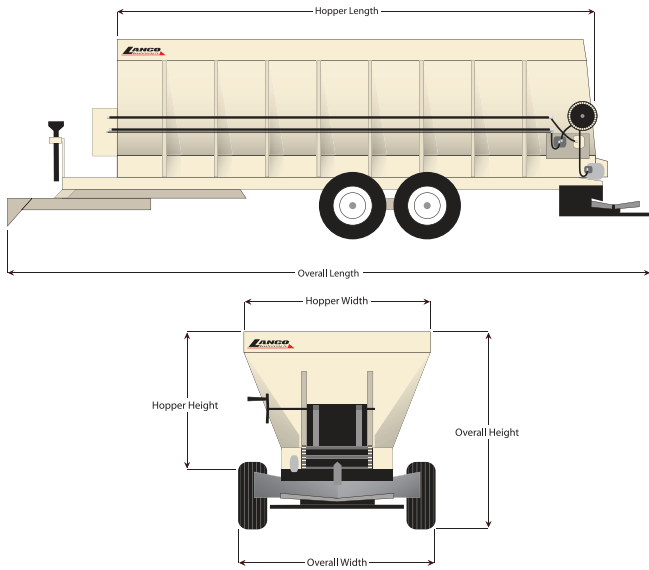

Specifications	Model LS 3550	Model LS 4000	Model LS 4440	Model LS 4880	Model LS 5330	Model LS 5780
Hopper Height	4'	4'	4'	4'	4'	4'
Hopper Width	8'	8'	8'	8'	8'	8'
Hopper Length	16'	18'	20'	22'	24'	26'
Hopper Capacity	355 cu. ft.	400 cu. ft.	444 cu. ft.	488 cu. ft.	533 cu. ft.	578 cu. ft.
Overall Height	7' 8"	7' 8"	7' 8"	7' 8"	8' 2"	8' 2"
Overall Width	8' 6"	8' 6"	8' 6"	8' 6"	9' 8"	9' 8"
Overall Length	24' 3"	26' 3"	28' 3"	30' 3"	32' 3"	34' 3"
Suspension	Walking Beam	Walking Beam	Walking Beam	Walking Beam	Walking Beam	Walking Beam
Wheel Track Width (Center to Center)	7' 1"	7' 1"	7' 1"	7' 1"	8' 2"	8' 2"
Empty Weight	5,485 lb.	5,920 lb.	6,495 lb.	7,250 lb.	7,475 lb.	7,725 lb.
Ten Ton Undercarriage	Standard	Standard	Standard	Standard	N/A	N/A
Twenty Ton Undercarriage	Optional	Optional	Optional	Optional	Standard	Standard
Thirty Ton Undercarriage (Tri-Axle)	Optional	Optional	Optional	Optional	Optional	Optional

*As the 5330/5780 models are Twenty Ton or Thirty Ton Only, Both Overall Height and Width and Wheel Track Widths are dictated by the tires selected by the customer, rather than being based off of the 16.5L x 16.1 tire standard on the Ten Ton models. Based on 21L x 16.1.



HYDRAULIC SYSTEM
Heavy duty hydraulic system provides years of reliable operation.



UNIQUE VERSATILITY BRINGS ADDED VALUE
Easy to remove spinner attachment provides the flexibility to use the machine as a spreader or grain cart.



WALKING BEAM SUSPENSION
Super-duty walking beam suspension helps absorb and distribute stress on the spreader when traveling rough terrain. This helps make operation easier and can add years to service life.



CAPACITY & COMMON SENSE
More even flow comes from a stronger 88K chain with a slat every other link. Materials like the corrosion-proof poly floor and multiple layers of high-durability industrial coatings stand up to the toughest conditions.

STANDARD FEATURES

- ✓ Walking beam suspension
- ✓ 16.5L x 16.1 10-ply tires on 10-ton units
- ✓ Quick-latch spinner attachment
- ✓ 12-volt apron on/off switch
- ✓ PTO Hydraulic drive, self-contained hydraulic system
- ✓ Check valve coupler on spinners for free-wheel stopping
- ✓ Double 28-inch spinner disks, made from 1/4" plate, six 10" blades per disk
- ✓ 34" wide conveyor
- ✓ 88K heavy duty pintle chain, with 3/8" thick slats
- ✓ Apron slats spaced every other link (3.75") for smoother spread patterns
- ✓ Heavy duty no-rust, no-rot poly floor
- ✓ 10,000 lb. capacity jack stand
- ✓ Folding side access ladder
- ✓ 12" x 8" "Load-View" window

OPTIONS

- ✓ Flotation tires (19L-16.1 10-ply)
- ✓ Flotation tires (21.5L-16.1 10-ply)
- ✓ Flotation tires (520-50-17 20.5" wide Trelleborg)
- ✓ Self-contained engine hydraulic unit
- ✓ Rollover tarp
- ✓ Manual tarp
- ✓ Hydraulic endgate
- ✓ Constant velocity PTO shaft
- ✓ Raven™ electronic variable rate control
- ✓ GPS electronic variable rate control
- ✓ Conveyor attachment with 2-way discharge
- ✓ Auger attachment
- ✓ Extension board support posts
- ✓ Weld-On hopper extensions
- ✓ Lanco POC Rate Control System
- ✓ And More!

BETTER SPREADING MADE SIMPLE

717-556-4143

WWW.LANCOEQUIPMENT.COM

LANCO
Manufacturing, CO.